

Features

- Uses CRM(CQ) advanced SkyMOS4 technology
- Extremely low on-resistance $R_{DS(on)}$
- Excellent $Q_g \times R_{DS(on)}$ product(FOM)
- Qualified according to JEDEC criteria

Product Summary

V_{DS}	100V
$R_{DS(on).typ}$	1.2mΩ
I_D	370A


Applications

- DCDC Converter
- Switching applications

100% DVDS Tested
100% Avalanche Tested





Top View



CRSZ015N10N4Z

Bottom View

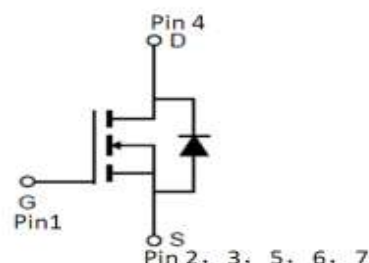

Package Marking and Ordering Information

Part #	Marking	Package	Packing	Reel Size	Tape Width	Qty
CRSZ015N10N4Z	015N10N4Z	TOLL	Tape&Reel	N/A	N/A	2000pcs

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-source voltage	V_{DS}	100	V
Continuous drain current	I_D	410	A
$T_C = 25^\circ\text{C}$ (Silicon limit)		370	
$T_C = 25^\circ\text{C}$ (Package limit)		260	
$T_C = 100^\circ\text{C}$ (Silicon limit)			
Pulsed drain current ($T_C = 25^\circ\text{C}$, t_p limited by T_{jmax})	$I_{D \text{ pulse}}$	1480	A
Avalanche energy, single pulse ($I_D = 88\text{A}$, $R_g = 25\Omega$) ^[1]	E_{AS}	1936	mJ
Gate-Source voltage	V_{GS}	± 20	V
Power dissipation ($T_C = 25^\circ\text{C}$)	P_{tot}	437	W
Operating junction and storage temperature	T_j, T_{stg}	-55...+150	°C
Soldering temperature, wave soldering only allowed at leads (1.6mm from case for 10s)	T_{sold}	260	°C

※. Notes:

EAS is tested at starting $T_j = 25^\circ\text{C}$, $L = 0.5\text{mH}$, $I_{AS} = 88\text{A}$, $V_{GS} = 10\text{V}$.

Thermal Resistance

Parameter	Symbol	Max	Unit
Thermal resistance, junction – case.	R_{thJC}	0.29	°C/W
Thermal resistance, junction – ambient(min. footprint)	R_{thJA}	42	

Electrical Characteristic (at $T_j = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		

Static Characteristic

Drain-source breakdown voltage	BV_{DSS}	100	-	-	V	$V_{GS}=0V, I_D=250\mu A$
		100	-	-	V	$V_{GS}=0V, I_D=1mA$
Gate threshold voltage	$V_{GS(th)}$	2.0	3.0	4.0	V	$V_{DS}=V_{GS}, I_D=250\mu A$
Zero gate voltage drain current	I_{DSS}	-	-	1	μA	$V_{DS}=100V, V_{GS}=0V$ $T_j=25^{\circ}\text{C}$
		-	-	100		$T_j=125^{\circ}\text{C}$
Gate-source leakage current	I_{GSS}	-	-	± 100	nA	$V_{GS}=\pm 20V, V_{DS}=0V$
Drain-source on-state resistance	$R_{DS(on)}$	-	1.2	1.5	mΩ	$V_{GS}=10V, I_D=100A$
		-	1.8	2.3		$V_{GS}=6V, I_D=80A$
Transconductance	g_{fs}	128	255	510	S	$V_{DS}=5V, I_D=100A$

Dynamic Characteristic

Input Capacitance	C_{iss}	9261	13891	20837	pF	$V_{GS}=0V, V_{DS}=50V,$ $f=1MHz$
Output Capacitance	C_{oss}	1463	2195	3293		
Reverse Transfer Capacitance	C_{rss}	13	40	120		
Gate Total Charge	Q_G	129	193	290	nC	$V_{GS}=10V, V_{DS}=50V,$ $I_D=100A, f=1MHz$
Gate-Source charge	Q_{gs}	56	84	126		
Gate-Drain charge	Q_{gd}	13	26	52		
Turn-on delay time	$t_{d(on)}$	22	44	88	ns	$V_{GS}=10V, V_{DD}=50V,$ $R_{G_ext}=3\Omega$
Rise time	t_r	52	78	117		
Turn-off delay time	$t_{d(off)}$	63	95	143		
Fall time	t_f	31	46	69		
Gate resistance	R_G	-	1.5	4.5	Ω	$V_{GS}=0V, V_{DS}=0V,$ $f=1MHz$

Body Diode Characteristic

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		
Diode continuous forward current	I_S	-	-	370	A	$T_C = 25^{\circ}\text{C}$
Diode pulse current	I_S pulse	-	-	1480	A	$T_C = 25^{\circ}\text{C}$
Body Diode Forward Voltage	V_{SD}	-	0.84	1.4	V	$V_{GS}=0V, I_{SD}=100A$
Body Diode Reverse Recovery Time	t_{rr}	53	105	210	ns	$I_F=100A, dI/dt=100A/\mu s$
Body Diode Reverse Recovery Charge	Q_{rr}	160	320	640	nC	

Typical Performance Characteristics

Fig 1: Output Characteristics

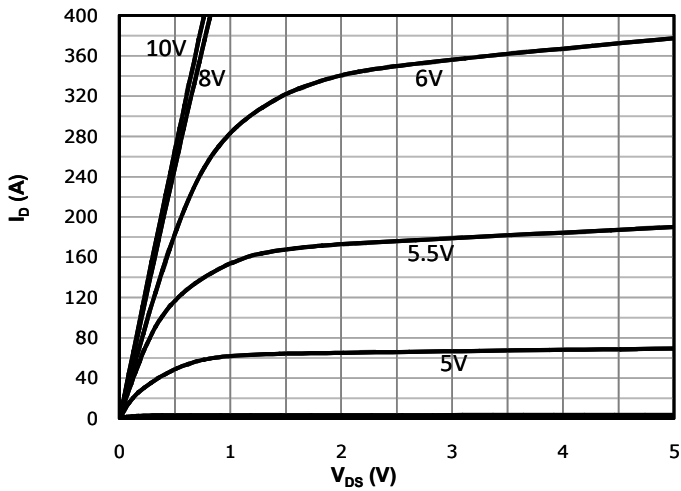


Fig 2: Transfer Characteristics

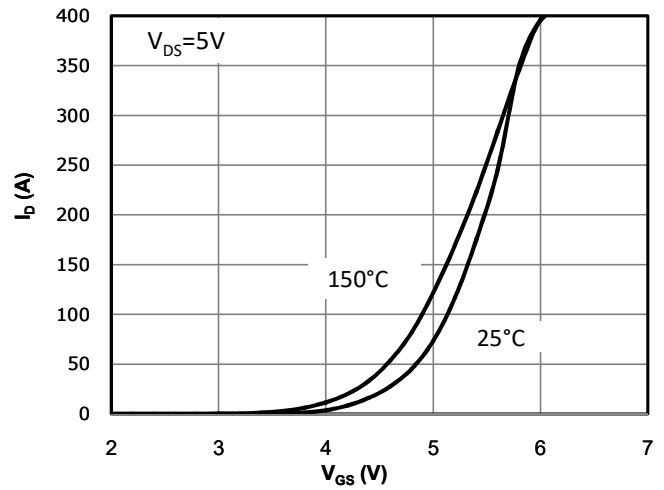


Fig 3: $R_{DS(on)}$ vs Drain Current and Gate Voltage

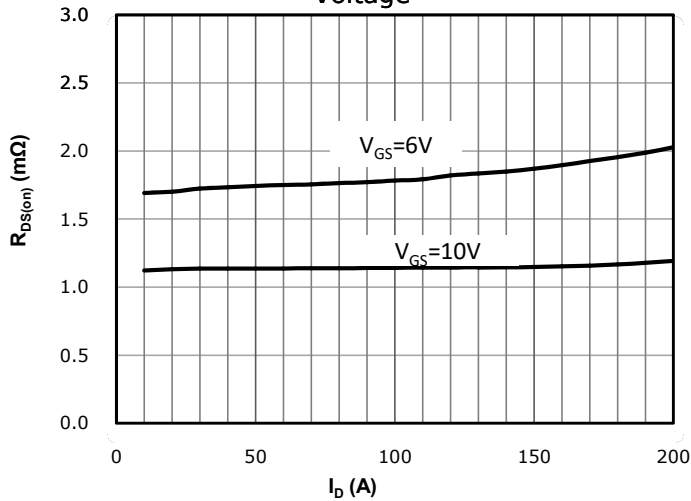


Fig 4: $R_{DS(on)}$ vs Gate Voltage

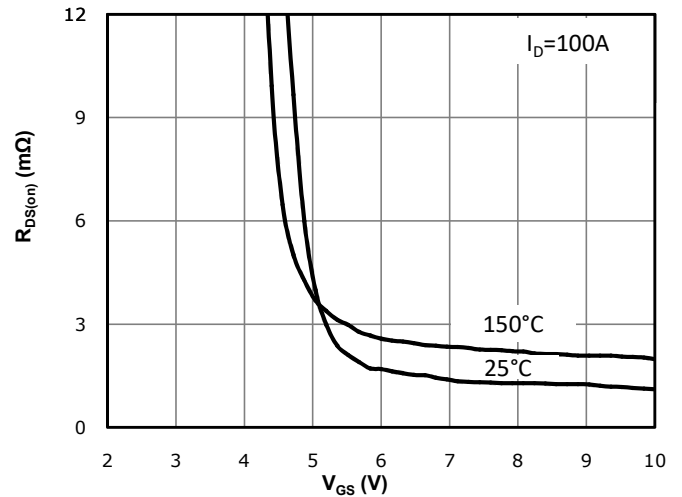


Fig 5: $R_{DS(on)}$ vs. Temperature

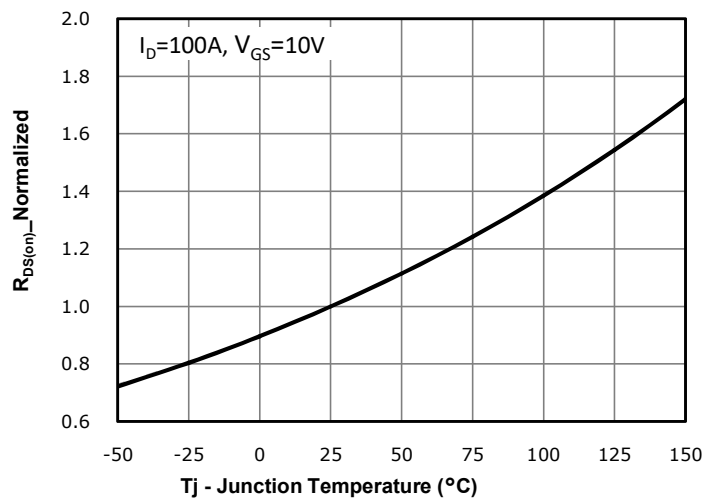


Fig 6: $V_{GS(th)}$ vs. Temperature

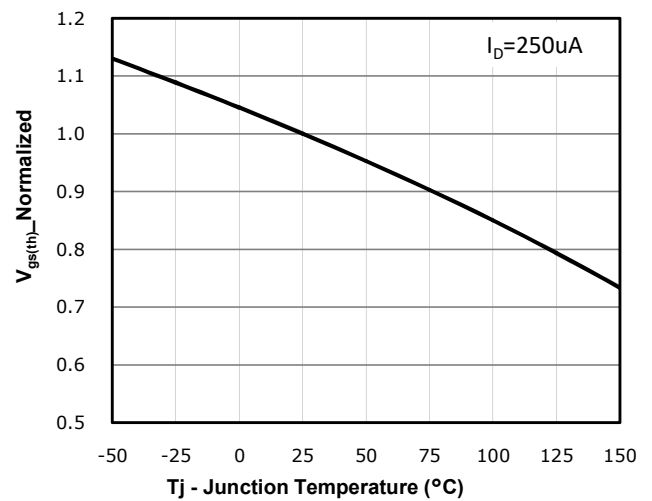


Fig 7: BVdss vs. Temperature

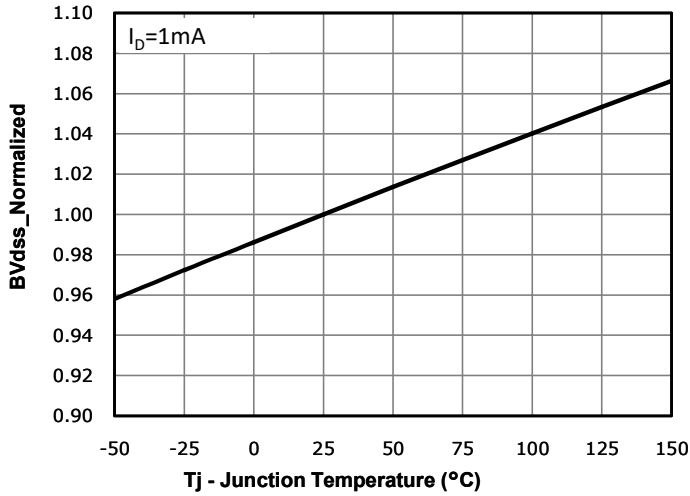


Fig 8: Capacitance Characteristics

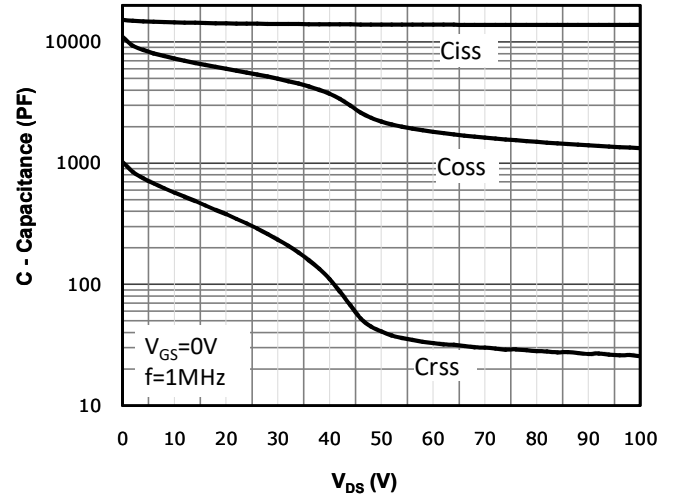


Fig 9: Gate Charge Characteristics

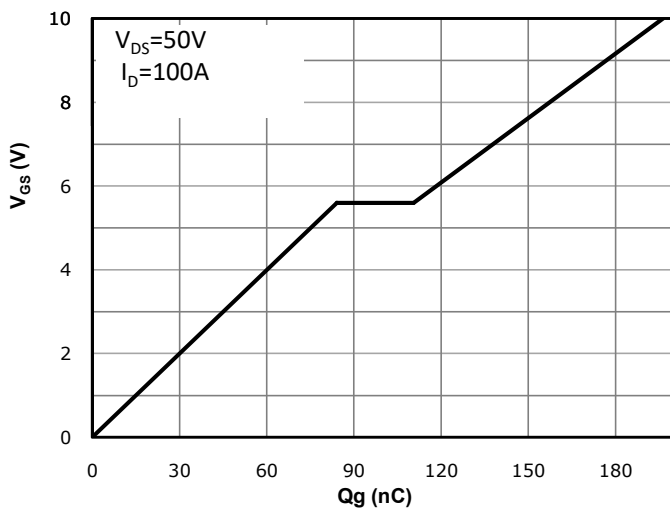


Fig 10: Body-diode Forward Characteristics

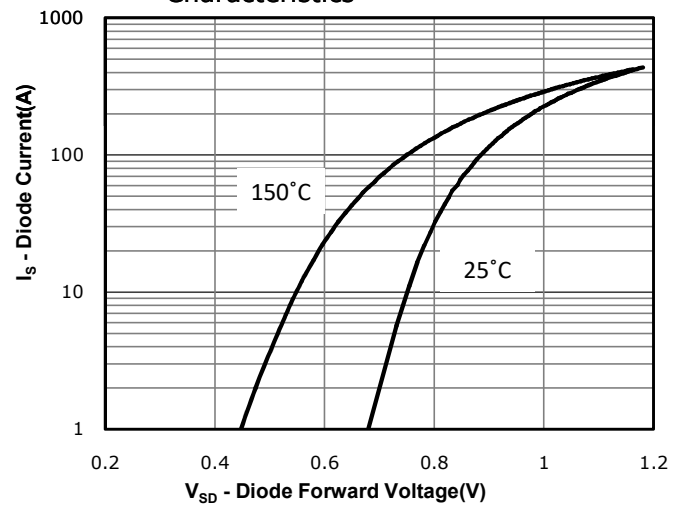


Fig 11: Power Dissipation

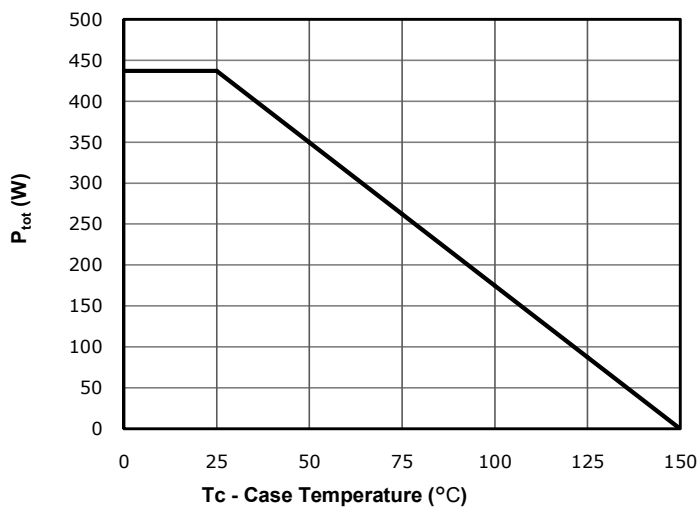


Fig 12: Drain Current Derating

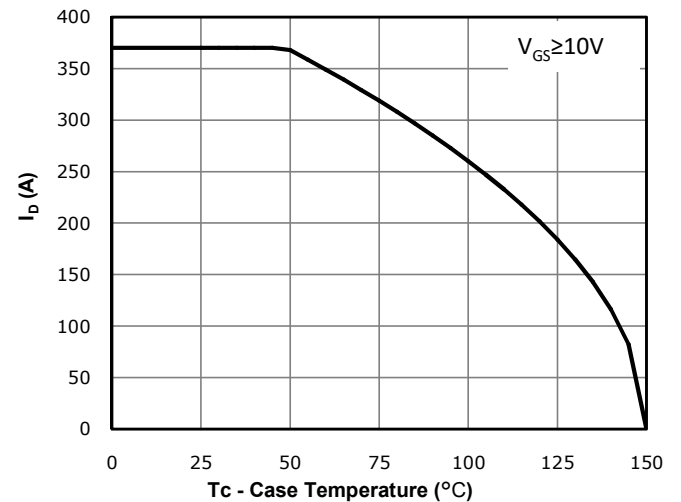


Fig 13: Safe Operating Area




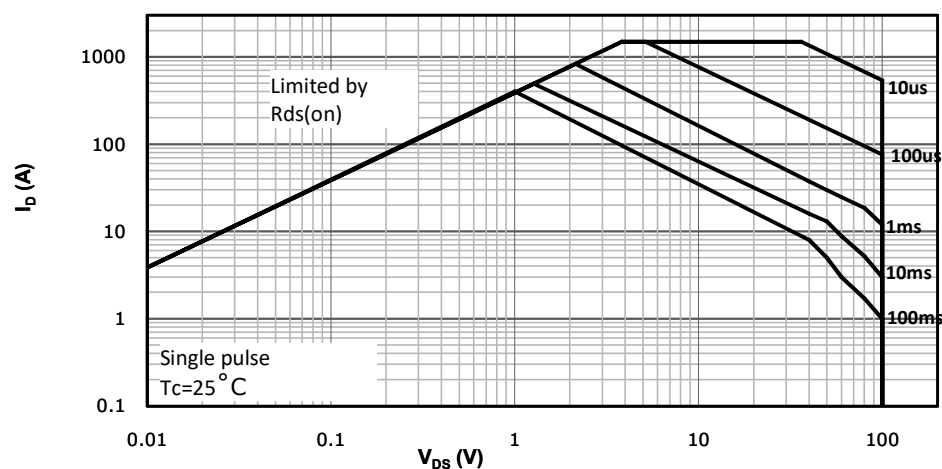


Fig 14: Max. Transient Thermal Impedance

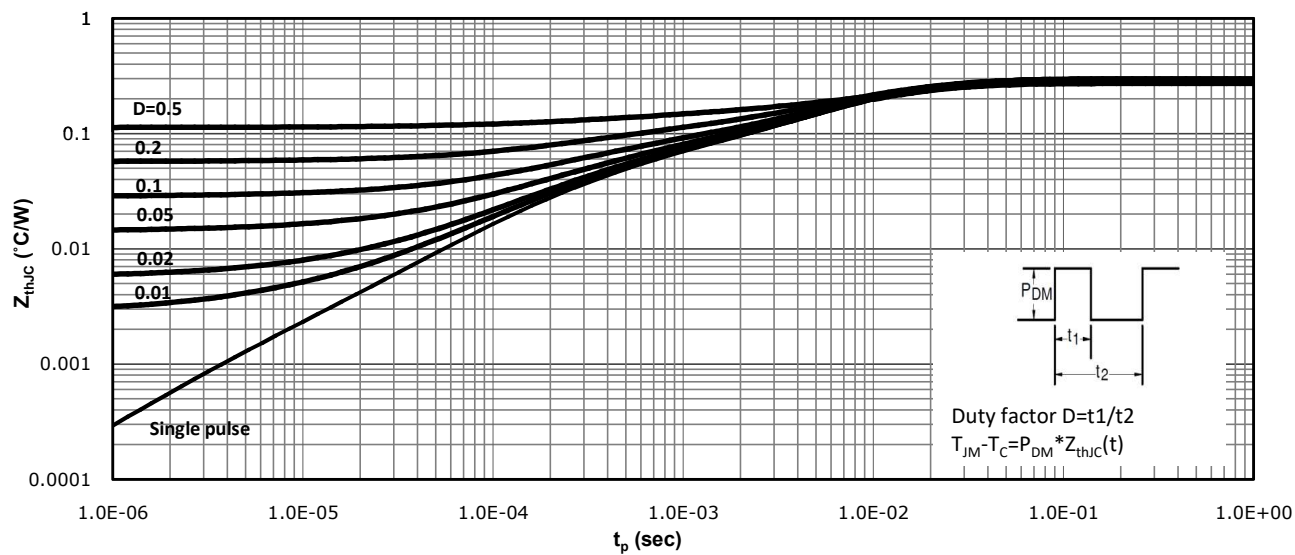
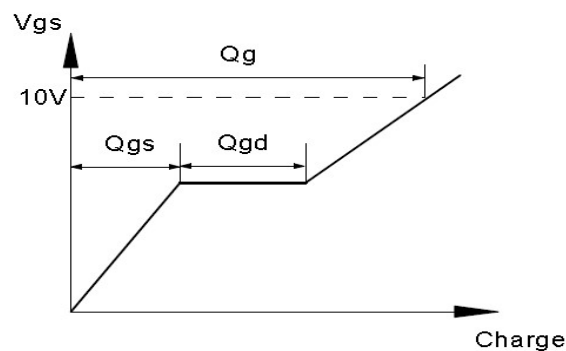


Test Circuit & Waveform



Gate Charge Test Circuit & Waveform

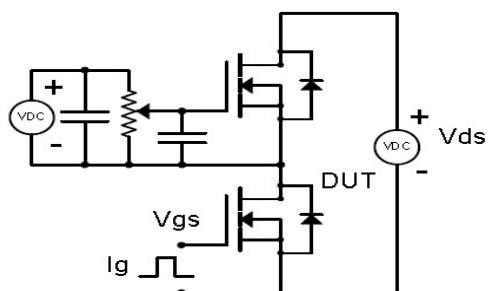



Resistive Switching Test Circuit & Waveforms

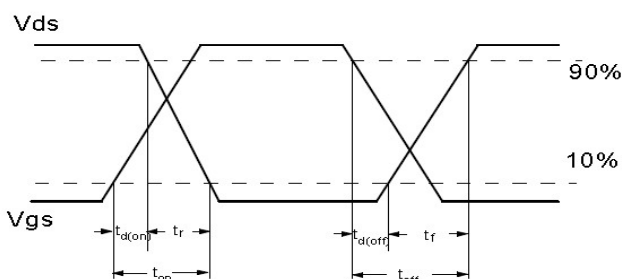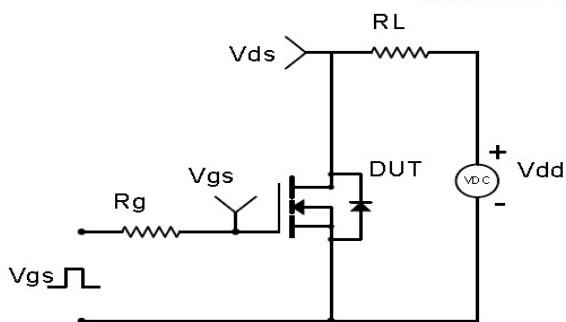


Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

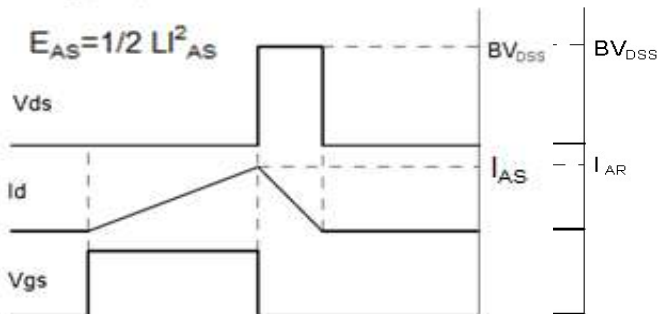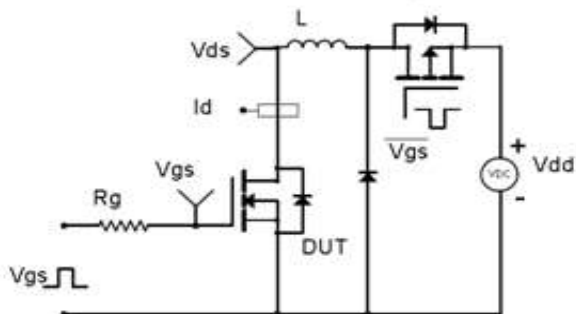


Diode Recovery Test Circuit & Waveforms

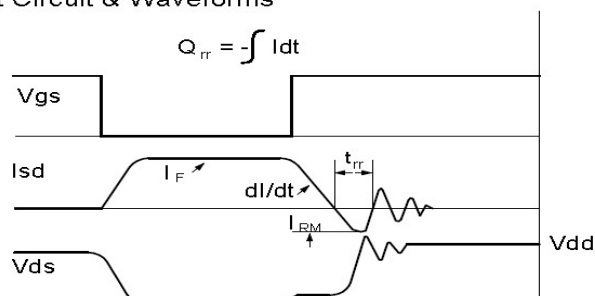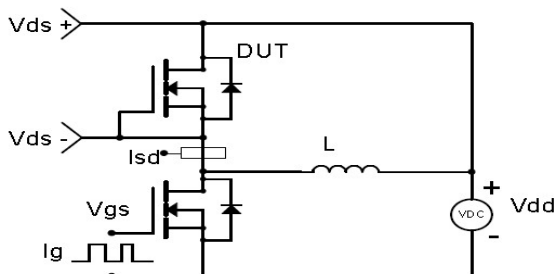

Package Outline: TO11

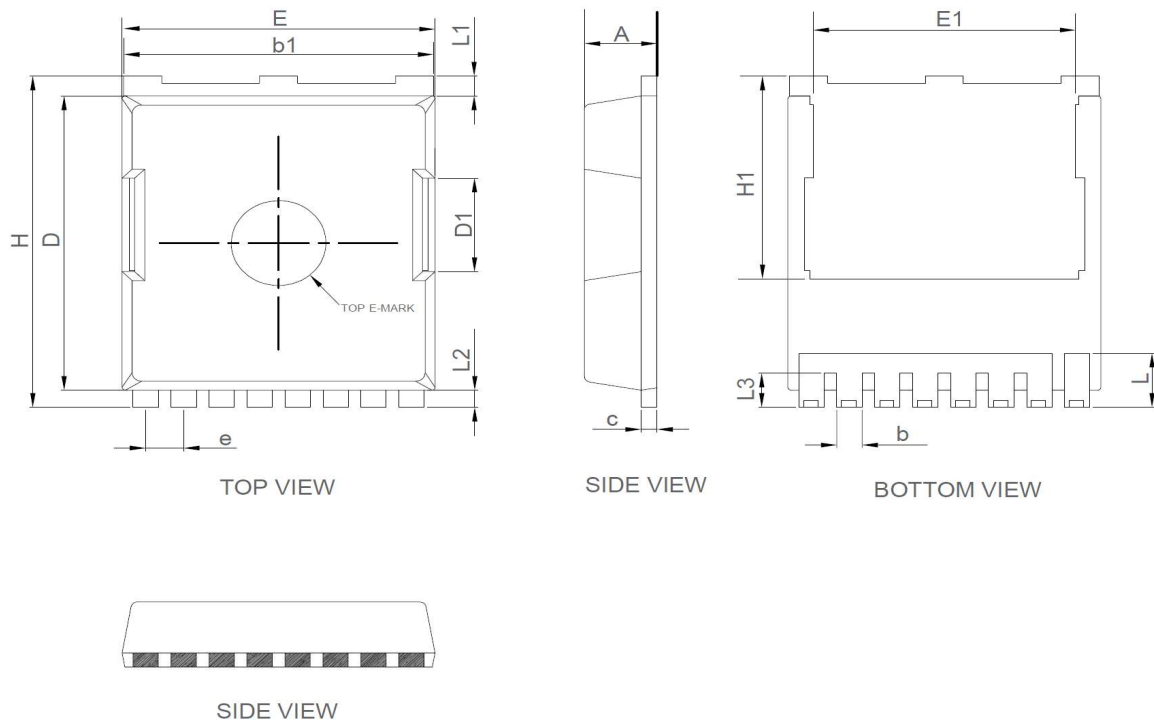

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.15	2.45	0.085	0.096
b	0.60	0.90	0.024	0.035
b1	9.65	9.95	0.380	0.392
c	0.35	0.65	0.014	0.026
D	10.18	10.70	0.401	0.421
D1	3.15	3.45	0.124	0.136
E	9.70	10.10	0.382	0.398
E1	7.35	8.45	0.289	0.333
e	1.10	1.30	0.043	0.051
H	11.45	11.95	0.451	0.470
H1	6.55	7.50	0.258	0.295
L	1.35	2.10	0.053	0.083
L1	0.50	0.90	0.020	0.035
L2	0.40	0.80	0.016	0.031
L3	0.95	1.35	0.037	0.053

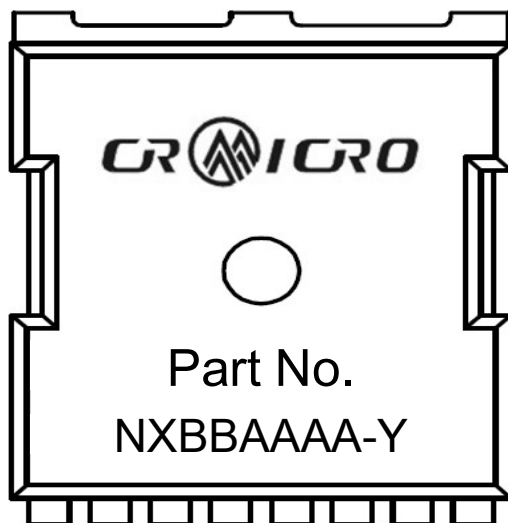Marking**NOTE:**

NXBBAAAA-Y

N	—Wire Bond code
X	—Assembly location code
BB	—Fab code
AAAA	—Lot code
Y	—Bin code

Revision History

Revision	Date	Major changes
1.0	2024/7/9	Release of preliminary 1.0 version.

Disclaimer

CRM reserves the right to change any product or information in this Specification at any time without prior notice.

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

The product is not intended for use in applications that require extraordinary levels of quality and reliability, such as aviation/aerospace and life-support devices or systems.

Any and all semiconductor products have certain probability to fail or malfunction, which may result in personal injury, death or property damage. Customer are solely responsible for providing adequate safe measures when design their systems.