

Features

- Uses CRM(CQ) advanced Trench MOS technology
- Extremely low on-resistance $R_{DS(on)}$
- Excellent $Q_g \times R_{DS(on)}$ product(FOM)
- Qualified according to JEDEC criteria

Applications


- Motor control and drive
- Battery management
- UPS (Uninterruptible Power Supplies)

Product Summary

V_{DS}	20V
$R_{DS(on)}$ typ.	12mΩ
I_D	10A

ESD Protected

100% Avalanche Tested

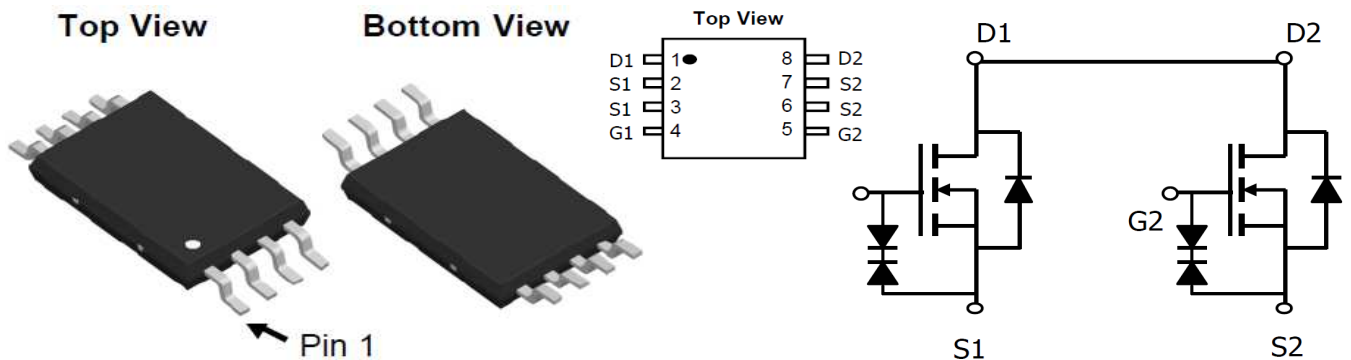

Package Marking and Ordering Information

Part #	Marking	Package	Packing	Reel Size	Tape Width	Qty
CR8810	8810	TSSOP8	Reel	N/A	N/A	5000pcs

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-source voltage	V_{DS}	20	V
Continuous drain current	I_D	13	A
$T_C = 25^\circ\text{C}$ (Silicon limit)		10	
$T_C = 25^\circ\text{C}$ (Package limit)		8	
$T_C = 100^\circ\text{C}$ (Silicon limit)			
Pulsed drain current ($T_C = 25^\circ\text{C}$, t_p limited by T_{jmax})	$I_{D \text{ pulse}}$	40	A
Avalanche energy, single pulse ($L=0.1\text{mH}$, $R_g=25\Omega$)	E_{AS}	1.25	mJ
Gate-Source voltage	V_{GS}	± 8	V
ESD	HBM	2.5	KV
Power dissipation ($T_C = 25^\circ\text{C}$)	P_{tot}	4	W
Operating junction and storage temperature	T_j, T_{stg}	$-55 \dots +150$	$^\circ\text{C}$
Soldering temperature, wave soldering only allowed at leads (1.6mm from case for 10s)	T_{sold}	260	$^\circ\text{C}$

Thermal Resistance

Parameter	Symbol	Max	Unit
Thermal resistance, junction – lead.	R_{thJL}	29.5	°C/W
Thermal resistance, junction – ambient(min. footprint)	R_{thJA}^*	112	

Electrical Characteristic (at $T_j = 25\text{ °C}$, unless otherwise specified)

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		

Static Characteristic

Drain-source breakdown voltage	BV_{DSS}	20	-	-	V	$V_{GS}=0V, I_D=250\mu A$
Gate threshold voltage	$V_{GS(th)}$	0.45	0.65	1	V	$V_{DS}=V_{GS}, I_D=250\mu A$
Zero gate voltage drain current	I_{DSS}	-	0.05	1	μA	$V_{DS}=20V, V_{GS}=0V$ $T_j=25\text{ °C}$
		-	-	50		$T_j=150\text{ °C}$
Gate-source leakage current	I_{GSS}	-	-	± 10	μA	$V_{GS}=\pm 8V, V_{DS}=0V$
Drain-source on-state resistance	$R_{DS(on)}$	-	12	15	$m\Omega$	$V_{GS}=4.5V, I_D=7A,$ $T_j=25\text{ °C}$
		-	19	24		$T_j=150\text{ °C}$
		-	16	20		$V_{GS}=2.5V, I_D=5.5A$
Transconductance	g_{fs}	-	36	-	S	$V_{DS}=5V, I_D=7A$

Dynamic Characteristic

Input Capacitance	C_{iss}	-	758	-	pF	$V_{GS}=0V, V_{DS}=10V,$ $f=1MHz$
Output Capacitance	C_{oss}	-	144	-		
Reverse Transfer Capacitance	C_{rss}	-	126	-		
Gate Total Charge	Q_G	-	21.7	-	nC	$V_{GS}=10V, V_{DS}=10V,$ $I_D=7A, f=1MHz$
Gate-Source charge	Q_{gs}	-	2.1	-		
Gate-Drain charge	Q_{gd}	-	3.2	-		
Turn-on delay time	$t_{d(on)}$	-	8	-	ns	$V_{GS}=5V, V_{DD}=10V,$ $R_{G_ext}=2.7\Omega, I_D=7A$
Rise time	t_r	-	50	-		
Turn-off delay time	$t_{d(off)}$	-	38	-		
Fall time	t_f	-	73	-		
Gate resistance	R_G	-	4.0	-	Ω	$V_{GS}=0V, V_{DS}=0V,$ $f=1MHz$

Body Diode Characteristic

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		
Body Diode Forward Voltage	V_{SD}	-	0.8	1.3	V	$V_{GS}=0V, I_{SD}=7A$
Body Diode Forward Current	I_S			10	A	$T_C = 25^{\circ}C$
Body Diode Reverse Recovery Time	t_{rr}	-	12	-	ns	$I_F=7A, dI/dt=100A/\mu s$
Body Diode Reverse Recovery Charge	Q_{rr}	-	2	-	nC	

*The value of R_{thJA} is measured by placing the device in a still air box which is one cubic foot.

Typical Performance Characteristics

Fig 1: Output Characteristics

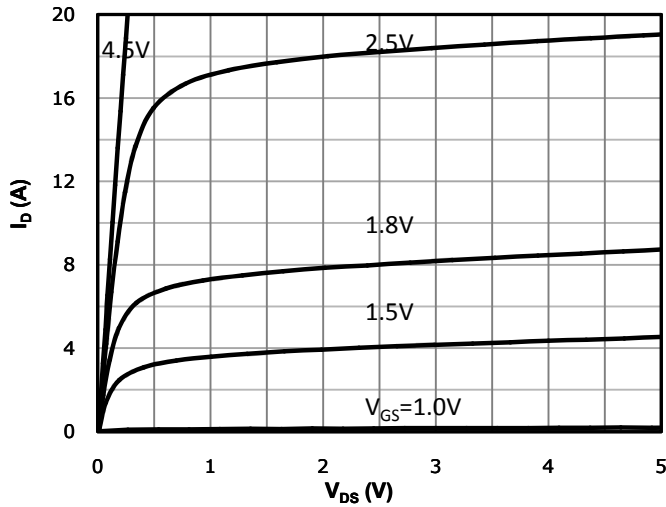


Fig 2: Transfer Characteristics

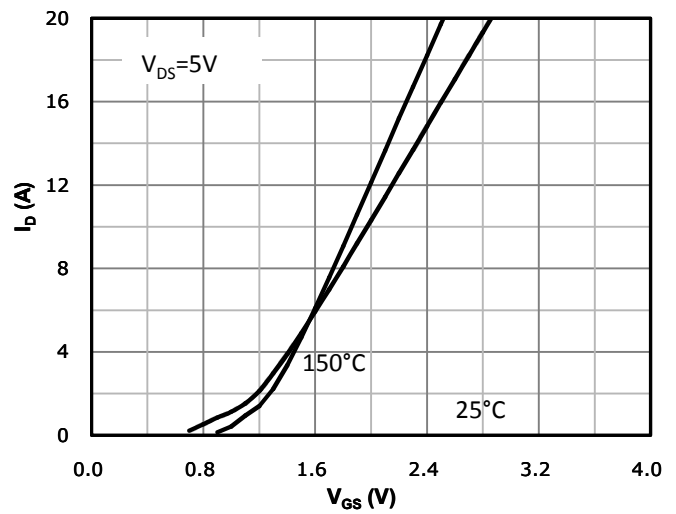
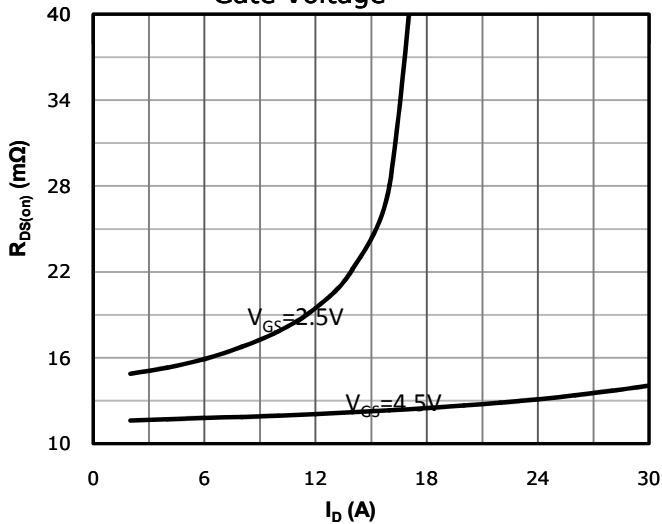
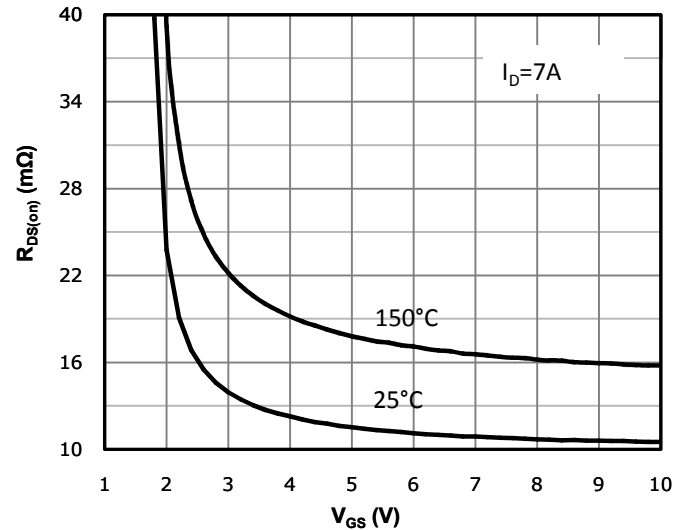
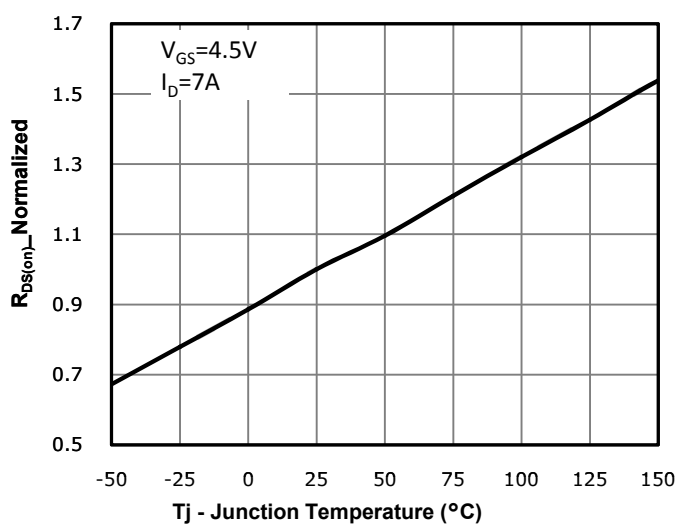

 Fig 3: $R_{DS(on)}$ vs Drain Current and Gate Voltage

 Fig 4: $R_{DS(on)}$ vs Gate Voltage

 Fig 5: $R_{DS(on)}$ vs. Temperature


Fig 6: Capacitance Characteristics

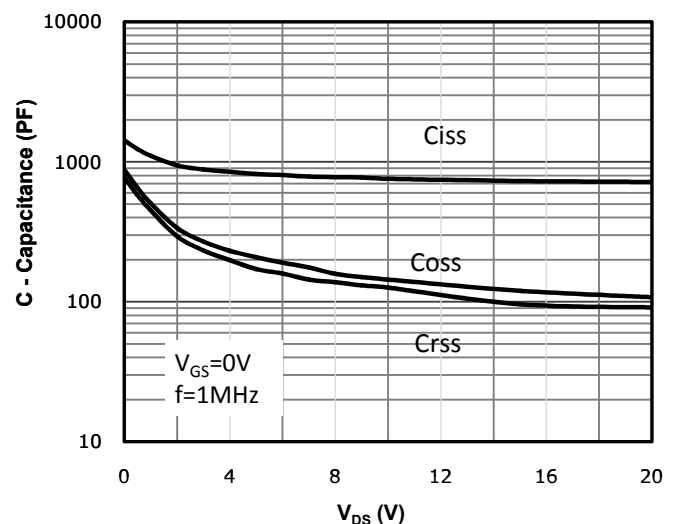


Fig 7: Gate Charge Characteristics

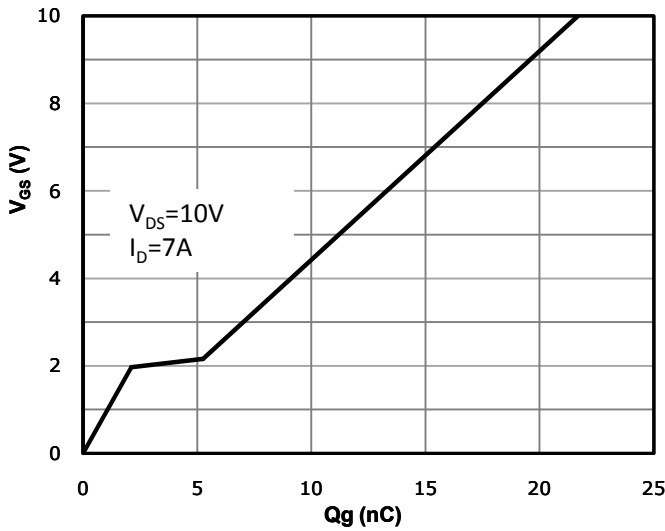


Fig 8: Body-diode Forward Characteristics

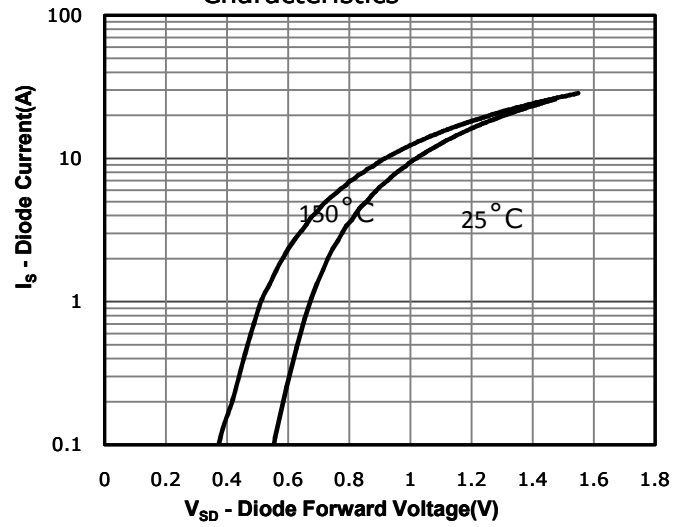


Fig 9: Power Dissipation

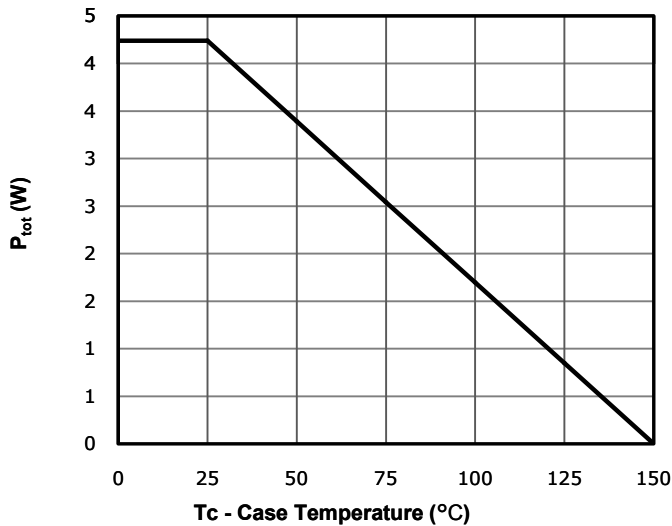


Fig 10: Drain Current Derating

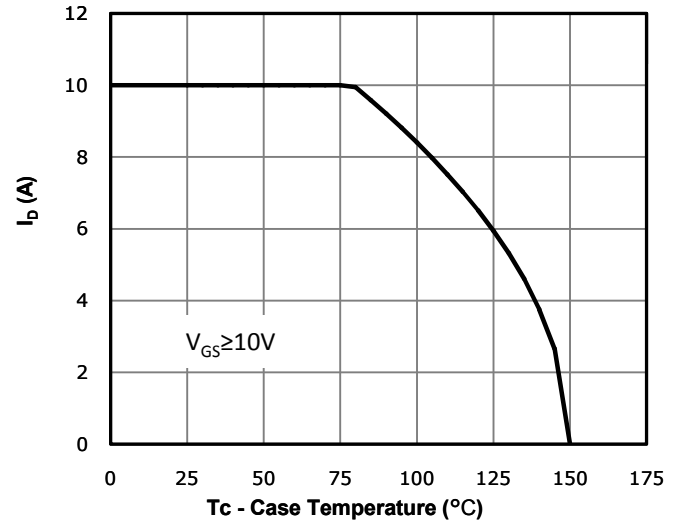


Fig 11: Safe Operating Area




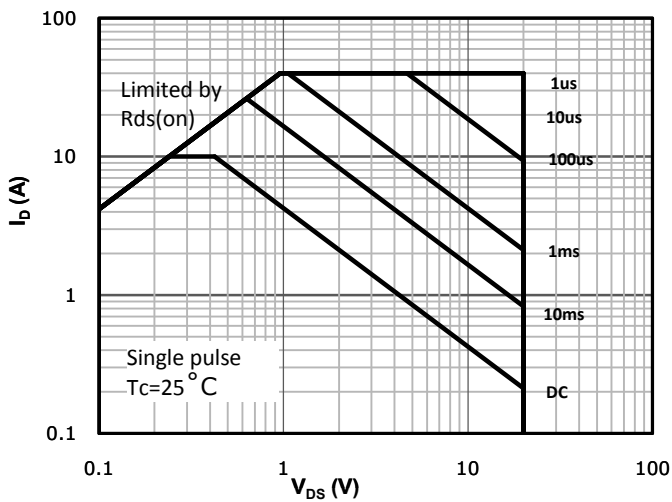


Fig 12: Max. Transient Thermal Impedance

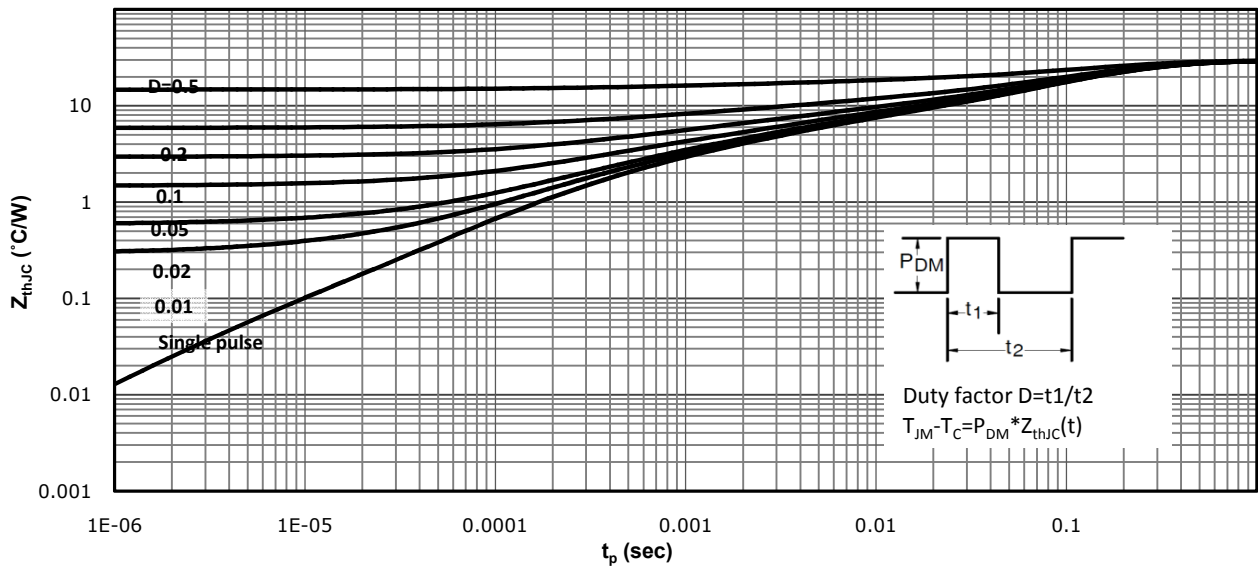
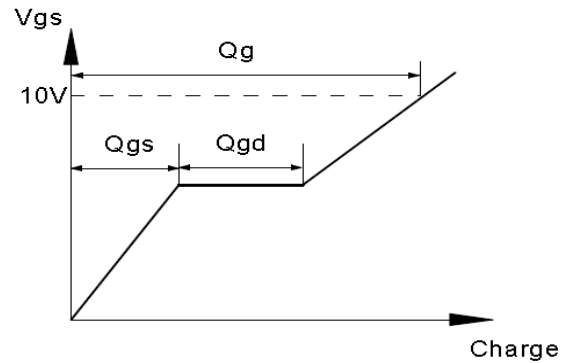


Test Circuit & Waveform



Gate Charge Test Circuit & Waveform

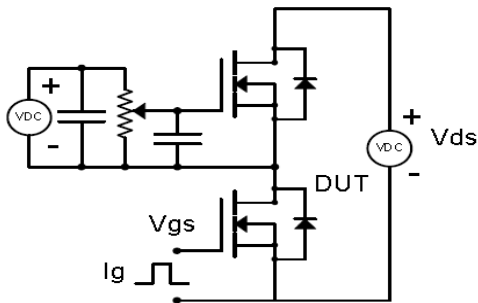



Resistive Switching Test Circuit & Waveforms

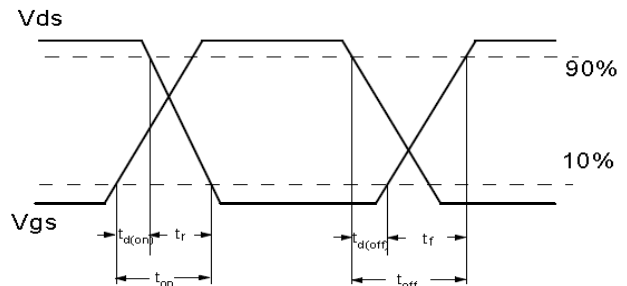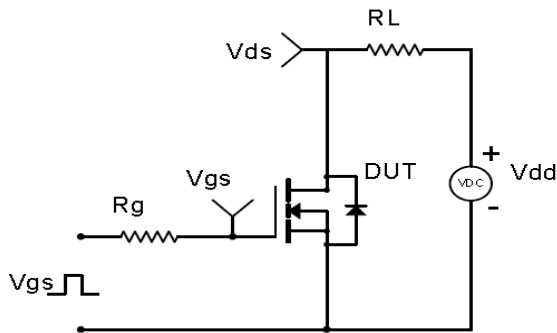


Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

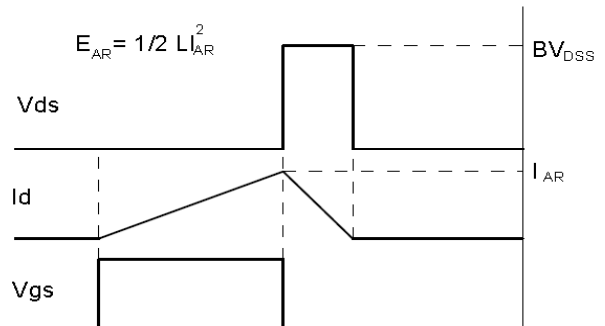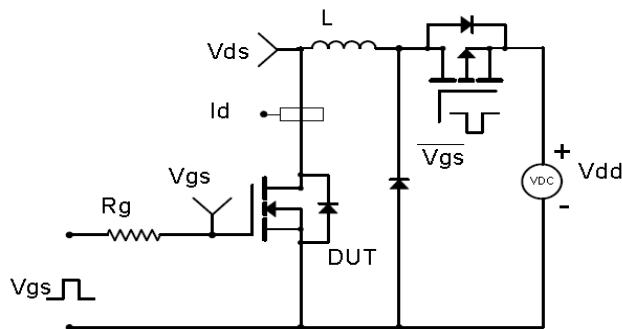

Diode Recovery Test Circuit & Waveforms

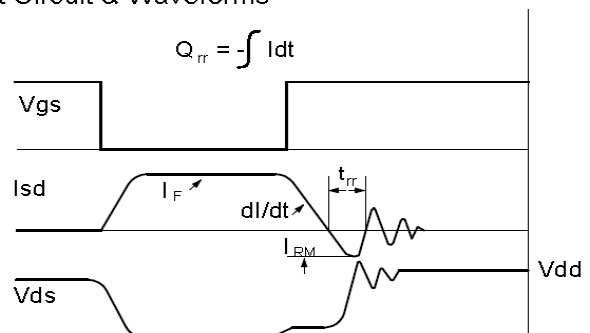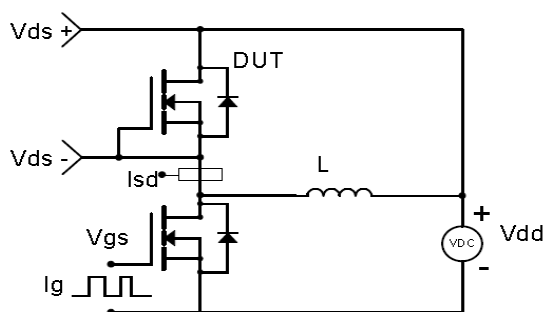

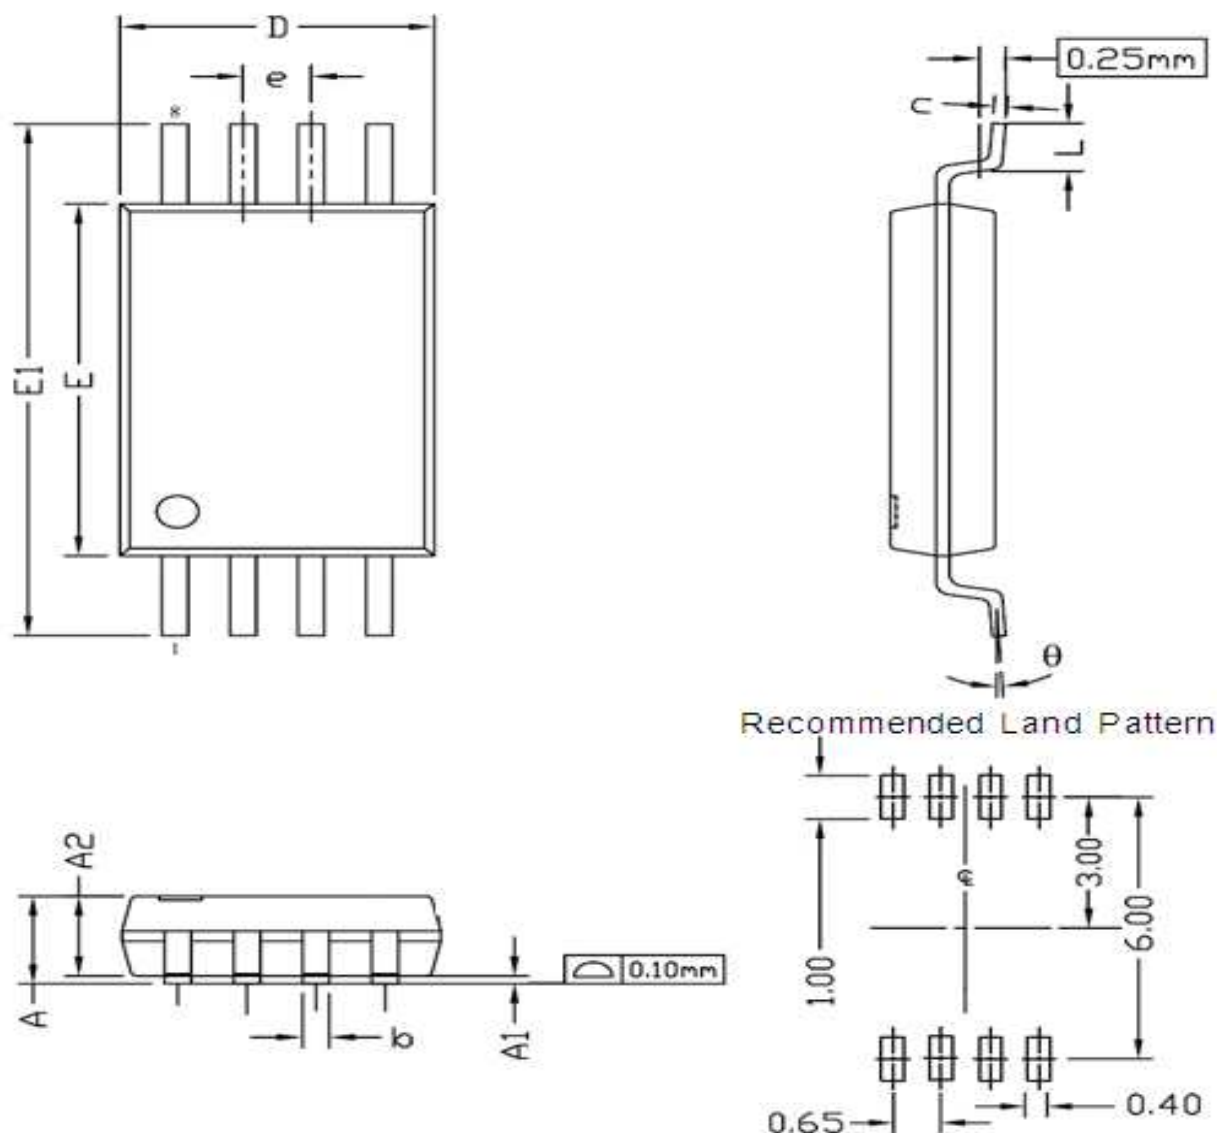Package Outline: TSSOP8


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	--	1.20	--	0.047
A1	0.05	0.15	0.002	0.006
A2	0.80	1.05	0.031	0.041
b	0.19	0.30	0.007	0.012
c	0.09	0.20	0.004	0.008
D	2.83	3.10	0.111	0.122
e	0.65 BSC.		0.026 BSC.	
E	4.30	4.50	0.169	0.177
E1	6.20	6.60	0.244	0.260
L	0.45	0.75	0.018	0.030
θ	0°	8°	0°	8°

Revision History

Revision	Date	Major changes
0.0	2019/8/20	Release of formal version

Disclaimer

Unless otherwise specified in the datasheet, the product is designed and qualified as a standard commercial product and is not intended for use in applications that require extraordinary levels of quality and reliability, such as automotive, aviation/aerospace and life-support devices or systems.

Any and all semiconductor products have certain probability to fail or malfunction, which may result in personal injury, death or property damage. Customer are solely responsible for providing adequate safe measures when design their systems.

CRM(CQ) reserves the right to improve product design, function and reliability without notice.