



CRG15T60A04S

General Description:

Using HUAJING's proprietary trench design and advanced Field Stop (FS) technology, offering superior conduction and switching performances. RoHS Compliant.

V_{CES}	600	V
I_C	15	A
$V_{CE(sat)}$	1.55	V

Features:



- FS Trench Technology, Positive temperature coefficient
- Low saturation voltage:

$V_{CE(sat),TYP}=1.55V @I_C=15A, V_{GE}=15V$;

Applications

- Motor control
- UPS, FPC

TO-263



Package Parameters

Type	Marking	Package	Packing
CRG15T60A04S	G15T60A04S	TO-263	Tape & Reel

Absolute Maximum Ratings ($T_C = 25^\circ\text{C}$ unless otherwise specified):

Symbol	Parameter	Rating	Units
V_{CES}	Collector-Emitter Voltage	600	V
V_{GES}	Gate- Emitter Voltage	± 20	V
I_C	Collector Current @ $T_C = 25^\circ\text{C}$	30	A
	Collector Current @ $T_C = 100^\circ\text{C}$	15	
I_{CM}^{a1}	Pulsed Collector Current	45	A
I_F	Diode Continuous Forward Current @ $T_C = 25^\circ\text{C}$	20	A
	Diode Continuous Forward Current @ $T_C = 100^\circ\text{C}$	10	A
I_{FM}	Diode Maximum Forward Current	40	A
P_D	Power Dissipation @ $T_C = 25^\circ\text{C}$	78	W
T_J	Operating Junction	$-40 \sim 150$	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	$-55 \sim 150$	$^\circ\text{C}$
T_L	Wave Soldering Temperature for 10 sec	270	$^\circ\text{C}$

a1: Repetitive rating; pulse width limited by maximum junction temperature

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Units
$R_{\theta JC}$	Thermal Resistance, Junction to case for IGBT	--	1.6	$^\circ\text{C/W}$
$R_{\theta JC}$	Thermal Resistance, Junction to case for Diode	--	2.8	$^\circ\text{C/W}$
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	--	62.5	$^\circ\text{C/W}$

Electrical Characteristics of the IGBT ($T_C = 25^\circ\text{C}$ unless otherwise specified):

Symbol	Parameter	Test Conditions	SPEC			Units
			Min.	Typ.	Max.	
OFF Characteristics						
V _{(BR)CES}	Collector-Emitter Breakdown Voltage	V _{GE} =0V,I _{CE} =250uA	600	--	--	V
I _{CES}	Collector-Emitter Leakage Current	V _{GE} =0V,V _{CE} =600V	--	--	1.0	mA
I _{GES(F)}	Gate to Emitter Forward Leakage	V _{GE} =+20V	--	--	+250	nA
I _{GES(R)}	Gate to Source Reverse Leakage	V _{GE} =-20V	--	--	-250	nA
ON Characteristics						
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C =15A ,V _{GE} =15V	--	1.55	2.4	V
V _{GE(th)}	Gate Threshold Voltage	I _C =250u A ,V _{CE} =V _{GE}	4.0	5.5	7.0	V
Pulse width tp≤300μs,δ≤2%						
Dynamic Characteristics						
C _{ies}	Input Capacitance	V _{CE} =25V,V _{GE} =0V f=1MHz	--	1313	--	pF
C _{oes}	Output Capacitance		--	44	--	
C _{res}	Reverse Transfer Capacitance		--	15	--	

Switching Characteristics						
t _{d(on)}	Turn-on Delay Time	V _{CE} =400V,I _C =15A, R _g =10 Ω,V _{GE} =15V, Inductive Load ,T _J =25℃	--	31.3	--	ns
t _r	Rise Time		--	25.9	--	
t _{d(off)}	Turn-Off Delay Time		--	119.3	--	
t _f	Fall Time		--	60.2	--	
E _{on}	Turn-On Switching Loss		--	0.5	--	mJ
E _{off}	Turn-Off Switching Loss		--	0.2	--	
E _{ts}	Total Switching Loss		--	0.7	--	
t _{d(on)}	Turn-on Delay Time	V _{CE} =400V,I _C =15A, R _g =10 Ω,V _{GE} =15V, Inductive Load ,T _J =150℃	--	31.0	--	
t _r	Rise Time		--	26.7	--	
t _{d(off)}	Turn-Off Delay Time		--	136.3	--	
t _f	Fall Time		--	77.8	--	
E _{on}	Turn-On Switching Loss		--	0.5	--	
E _{off}	Turn-Off Switching Loss		--	0.3	--	
E _{ts}	Total Switching Loss		--	0.8	--	
Q _g	Total Gate Charge	V _{CE} =480V,I _C =15A, V _{GE} =15V,	--	54	--	nC
Q _{ge}	Gate to Emitter Charge		--	10.7	--	
Q _{gc}	Gate to Collector Charge		--	27.7	--	
Electrical Characteristics of the DIODE (T _C = 25℃ unless otherwise specified):						
V _F	Diode Forward Voltage	I _F =8.0A	--	1.6	2.3	V
t _{rr}	Reverse Recovery Time	I _F =7.5A di/dt=100A/uS	--	57.6	--	ns
I _{rrm}	Reverse Recovery Current		--	3	--	A
Q _{rr}	Reverse Recovery Charge		--	86.8	--	nC

Typical Performance Characteristics

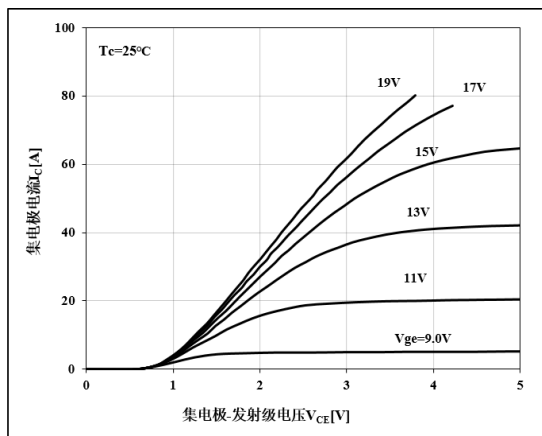


Figure 1. Output Characteristics

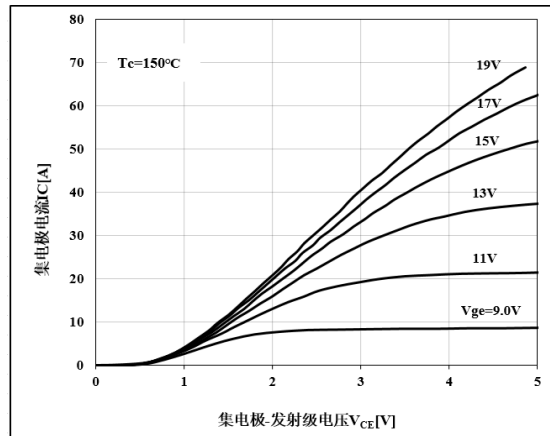


Figure 2. Output Characteristics

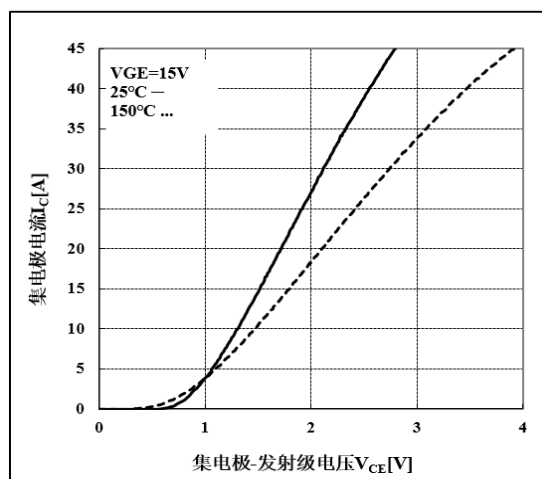


Figure 3. Saturation Voltage Characteristics

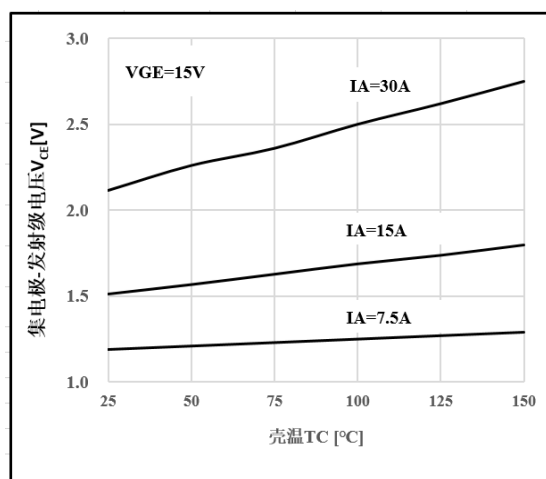


Figure 4. Saturation Voltage -Tc Characteristics

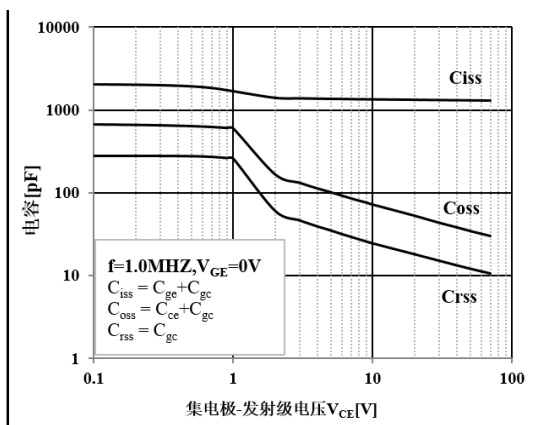


Figure 5. Capacitance Characteristics

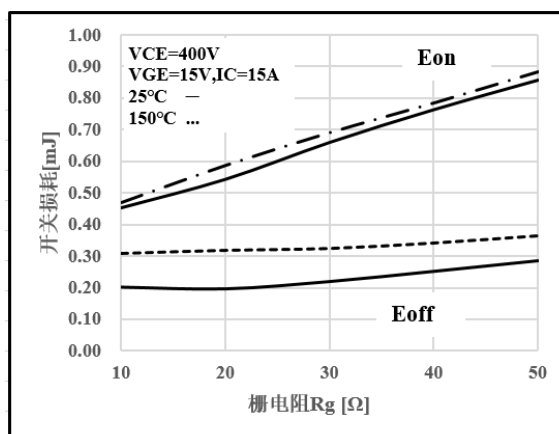


Figure 6. Switching Loss-R_G Characteristics

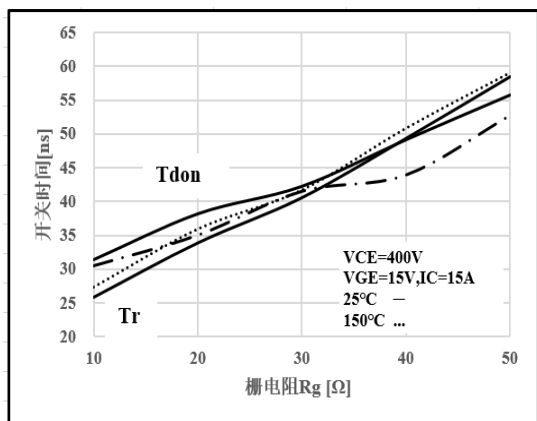


Figure 7. Switching Time- R_g Characteristics

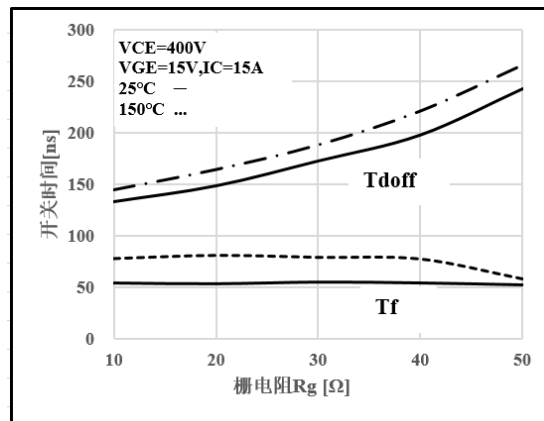


Figure 8. Switching Time- R_g Characteristics

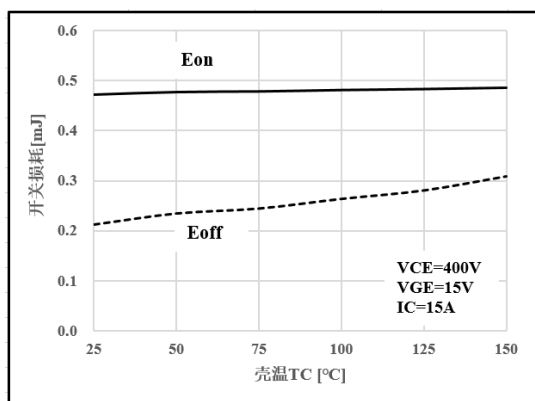


Figure 9. Switching Loss- T_c Characteristics

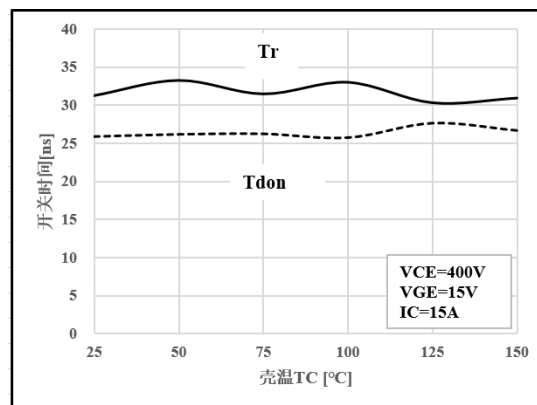


Figure 10. Switching Time- T_c Characteristics

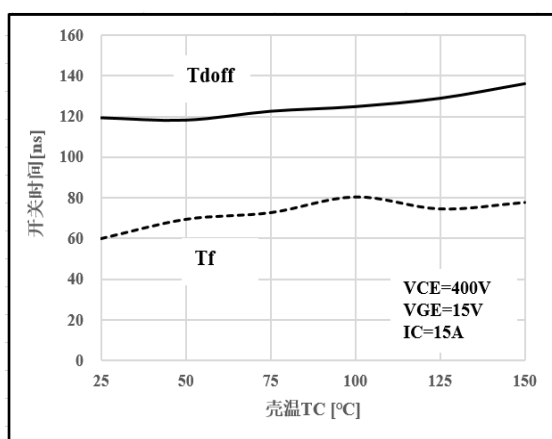


Figure 11. Switching Time- T_c Characteristics

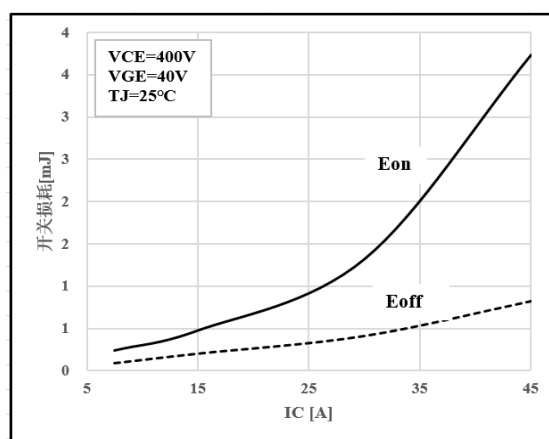


Figure 12. Switching Loss- I_c Characteristics

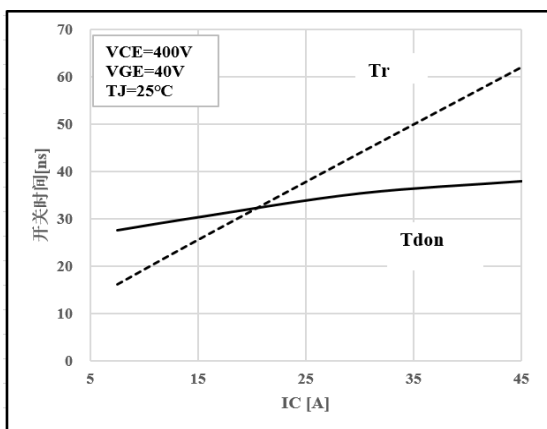


Figure 13. Switching Time-Ic Characteristics

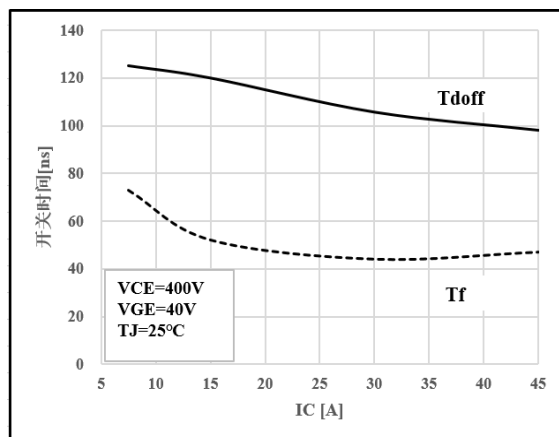


Figure 14. Switching Time-Ic Characteristics

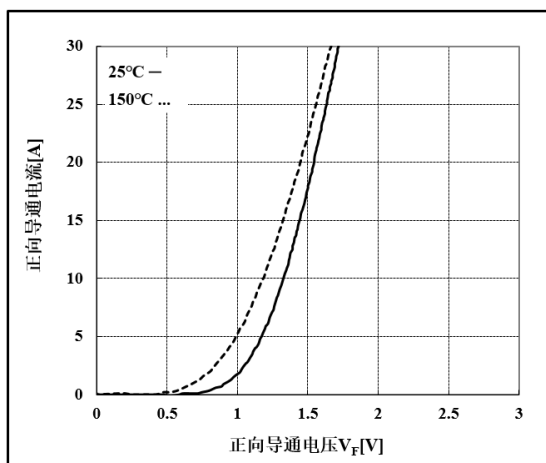


Figure 15. Diode Forward Characteristics

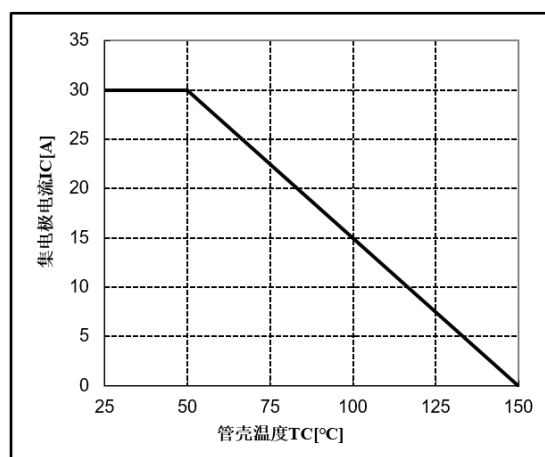


Figure 16. Collector Current -Tc Characteristics

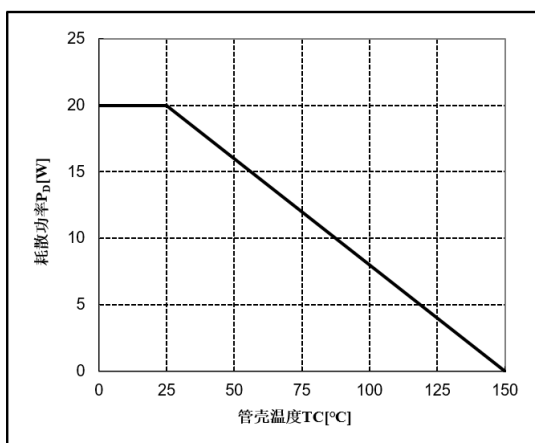


Figure 17. Power Dissipation -Tc Characteristics (TO-220F)

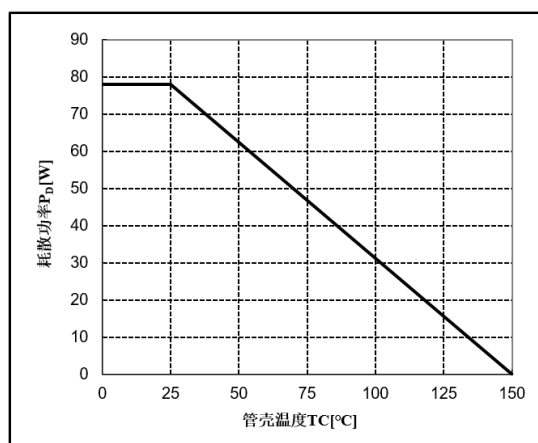


Figure 18. Power Dissipation -Tc Characteristics (TO-220AB)

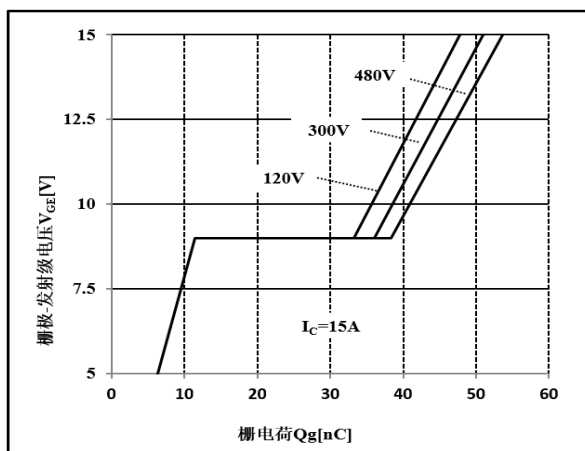


Figure 19. Gage Charge Characteristics

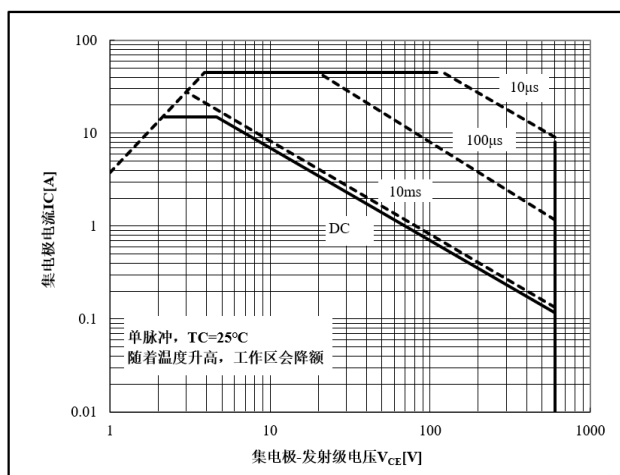


Figure 20. Forward Bias Safe Operating Area


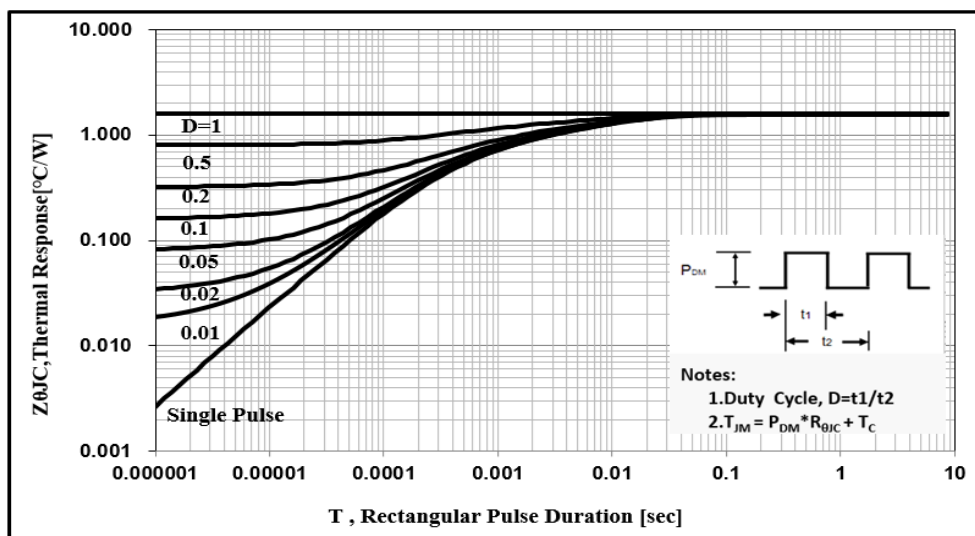


Figure 21.IGBT Transient Thermal Impedance

Package Information

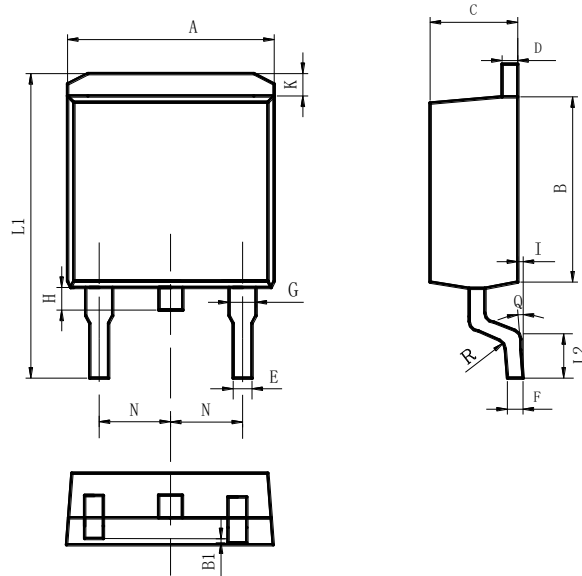

Items	Values(mm)	
	MIN	MAX
A	9.80	10.40
B	8.90	9.50
B1	0	0.10
C	4.40	4.80
D	1.16	1.37
E	0.70	0.95
F	0.30	0.60
G	1.07	1.47
H	1.30	1.80
K	0.95	1.37
L1	14.50	16.50
L2	1.90	2.90
I	0	0.2
Q	0°	8°
R	0.4	
N	2.39	2.69

TO-263 Package

The name and content of poisonous and harmful material in products

Part's Name Limit	Hazardous Substance									
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE	DIBP	DEHP	DBP	BBP
	≤0.1%	≤0.1%	≤ 0.01%	≤0.1%	≤0.1%	≤ 0.1%	≤ 0.1%	≤ 0.1%	≤ 0.1%	≤0.1%
Lead Frame	○	○	○	○	○	○	○	○	○	○
Molding	○	○	○	○	○	○	○	○	○	○
Chip	○	○	○	○	○	○	○	○	○	○
Wire Bonding	○	○	○	○	○	○	○	○	○	○
Solder	×	○	○	○	○	○	○	○	○	○
Note	○: Means the hazardous material is under the criterion of 2011/65/EU. ×: Means the hazardous material exceeds the criterion of 2011/65/EU. The plumbum element of solder exist in products presently, but within the allowed range of Eurogroup's RoHS.									

Warnings

1. Exceeding the maximum ratings of the device in performance may cause damage to the device, even the permanent failure, which may affect the dependability of the machine. It is suggested to be used under 80 percent of the maximum ratings of the device.
2. When installing the heat sink, please pay attention to the torsional moment and the smoothness of the heat sink.
3. IGBTs is the device which is sensitive to the static electricity, it is necessary to protect the device from being damaged by the static electricity when using it.
4. This publication is made by Huajing Microelectronics and subject to regular change without notice.

WUXI CHINA RESOURCES HUAJING MICROELECTRONICS CO., LTD.

Add: No.14 Liangxi RD. Wuxi, Jiangsu, China **Mail:** 214061 **https://www.crmicro.com**
Tel: 0510-85807228 **Fax:** 0510-85800864

Marketing Part: **Post:** 214061 **Tel / Fax:** 0510-85807228-3663/5508
0510-85800360 (Fax)

Application and Service: **Post:** 214061 **Tel / Fax:** 0510-85807228-3399 / 2227